



American Dynamics

A Tyco International Company

Discover 200 Series Cameras

Indoor Mini-Dome



Features That Make a Difference:

- High resolution 480 TVL camera
- 1/3 inch format CCD
- 4-9 mm auto iris lens
- 3 axis gimbal
- 12VDC or 12VDC/24VAC option
- Optional mounting accessories

The Discover 200 Series Mini-Dome offers models to suit all applications and budgets. For businesses that are commodity-driven and cost-sensitive, the 200 Series offers a powerful price/performance ratio.

All cameras offer backlight compensation (BLC), automatic gain control (AGC), auto iris and automatic white balance.

The Discover 200 Series Mini-Domes are the ideal choice for budget-conscious customers requiring high resolution images and accurate color rendition.

The 3 inch Mini-Dome features a quality vari-focal, auto iris lens, and a wall or ceiling mount. A 3-axis gimbal gives a full 360° pan and rotate, and 90° of tilt. The 4 inch version has an auto-sensing 12VDC/24VAC power input and can be fitted to a selection of mounting accessories. These cameras are extremely reliable, easy-to-install, and designed for use in a wide variety of applications.

These cameras are ideally suited for areas where high performance in a mixture of lighting conditions is required.

Specifications

Operational

Imager Interline transfer 1/3 inch CCD array
 Video Output 1.0 Vp-p/75 ohm, composite
 Horizontal Resolution 480 TVL
 Active Pixel Count NTSC 768 x 494 pixels
 Active Pixel Count PAL 752 x 582 pixels
 Lens 4 – 9 mm, F/1.6 fixed
 Min. Scene Illumination 1.2 lux
 S/N Ratio 48 dB
 Synchronization Internal

Controls

Gain Control Off (Normal) /On (Turbo Mode)
 Backlight Compensation On/Off

Connectors

Input Power In-line socket
 Composite Video BNC

Electrical

AC Voltage (ADCD201-D only) 24VAC (±20%)¹
 DC Voltage 12VDC (±10%)
 Power 2.8 Watts maximum

Mechanical

Unit Weight (3 inch dome) 200 g (0.5 lb)
 Unit Weight (4 inch dome) 300 g (0.7 lb)
 Construction Polycarbonate
 Color White

Environmental

Operational Temperature -10°C to 50°C (14°F to 122°F)
 Storage Temperature -20°C to 60°C (-4°F to 140°F)

Regulatory

Emissions FCC: Part 15, Class B
 CE: EN61000, Class B
 Immunity CE: EN50130-4
 Safety NTSC: UL60950, CSAC22.2 No 60950
 PAL: IEC60950


Ordering Information

Model Numbers	Description
ADCD200-D0001	3" mini dome, 480TVL, 4-9mm, 12VDC, clear, white, NTSC
ADCD200-D0002	3" mini dome, 480TVL, 4-9mm, 12VDC, clear, white, PAL
ADCD201-D0001	4" mini dome, 480TVL, 4-9mm, 12/24V, clear, white, NTSC
ADCD201-D0002	4" mini dome, 480TVL, 4-9mm, 12/24V, clear, white, PAL

Discover Mini-Dome Mounts

The 200 Series Mini-Domes include 6 mounting options.

Mounting Accessories	ADCD200-D	ADCD201-D
ADCPWMMWALL	Yes	Yes
ADCPWMPEND	No	Yes
ADCPWMRMK	No	Yes
ADCPWMPWM	No	Yes
ADCPWMCNRN	No	Yes
ADCPWMELEC	Yes	Yes

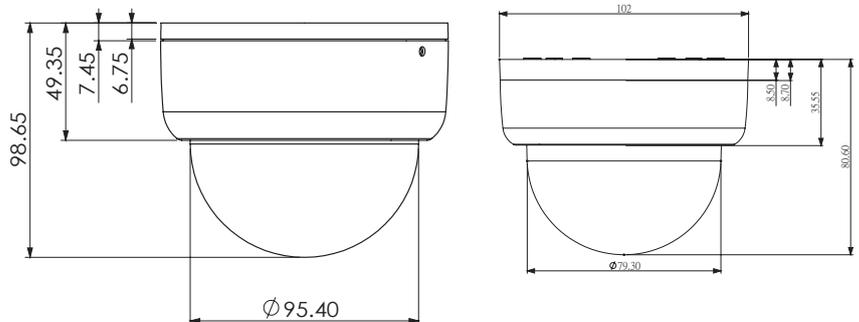

Accessories:

Power Supply ADC1121A

(1) Regulated power supply required

Related Products



victor



DVRs




HDVR



TVR Series

Approvals



The trademarks, logos, and service marks displayed on this document are registered in the United States [or other countries]. Any misuse of the trademarks is strictly prohibited and Tyco International Ltd. will aggressively enforce its intellectual property rights to the fullest extent of the law, including pursuit of criminal prosecution wherever necessary. All trademarks not owned by Tyco International Ltd. are the property of their respective owners, and are used with permission or allowed under applicable laws.

Product offerings and specifications are subject to change without notice. Actual products may vary from photos. Not all products include all features. Availability varies by region; contact your sales representative.
 © 2011 Tyco International Ltd. and its respective companies. All rights reserved. AD0173-DS-201010-R01-A4-EN