

# MLC-S Sprinkler Pipe & Fittings for Concrete Ceilings

## MLC-S Pipe


### MLC-S Sprinkler Pipe



Sizes	32 x 3 and 50 x 4.5 (DN25 & DN40)
Pipe Length	50m Coils or 5m Straight lengths
Approvals	VdS approval no. G 4060066.
Maximum Operating Pressure	10 bar (145 psi)
Maximum Temperature Rating	-10° - 40°C (14° - 104°F)
Colour	Bright red in colour as conforming to RAL 3000
Tech Data Sheet	Contact Tyco for details

100% oxygen diffusion tight multi-layer composite pipe (PE-RT – adhesive – overlapping longitudinally welded aluminium – adhesive – PE-RT) for the installation of pipelines (cold drinking water) as part of the sprinkler ceiling installation according to VdS approval no. G 4060066.

### Structure of the Tyco MLCP-S sprinkler pipe

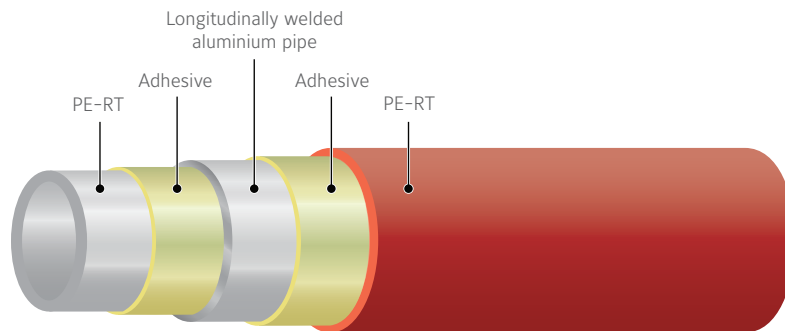

MLC-S Sprinkler Pipe							
Part No.	Dimension d <sub>a</sub> x s [mm]	Nominal Size	D <sub>i</sub> Inside Diameter	Unit Length	Weight per coil or rod	Weight per Meter	Approval & Listings VdS
735320	32 x 3 red in Coils	DN25	26mm	50 m	16.2	0.323	√
1045982	50 x 4.5 red in Lengths	DN40	41mm	5 m	3.72	0.745	√

### MLC-S Sprinkler System

